


LINECOD

Quasi-absolute magnetic system for elevators

series

SMAL2

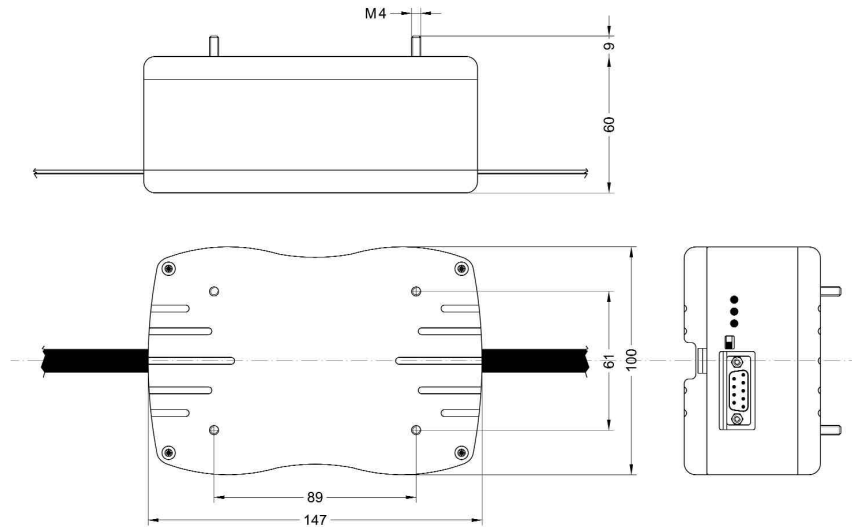

SMAL2

ENVIRONMENTAL SPECIFICATIONS

Operating temperature range:	-25°C ÷ +85°C (-13°F +185°F)
Storage temperature range:	-25°C ÷ +85°C (-13°F +185°F)
Protection:	IP54

MECHANICAL SPECIFICATIONS

Dimensions:	see drawing
Connections:	DSub connector
Travel speed:	max. 5 m/s
Resolution:	0,1 mm
Measurement length:	Tape length - 21 cm

ELECTRICAL SPECIFICATIONS

Power supply:	+10Vdc ÷ +30Vdc
Output circuit:	Push-Pull, Line Driver, SSI, RS485, CANopen, CANlift
Power consumption:	3,5 W max
Protection:	against inversion of polarity


MATERIALS

Sensor housing:	Plastic
Tape:	Plastoferrite on Steel




www.lika.biz
• Data sheet
• User manual

ORDERING CODE SMAL2

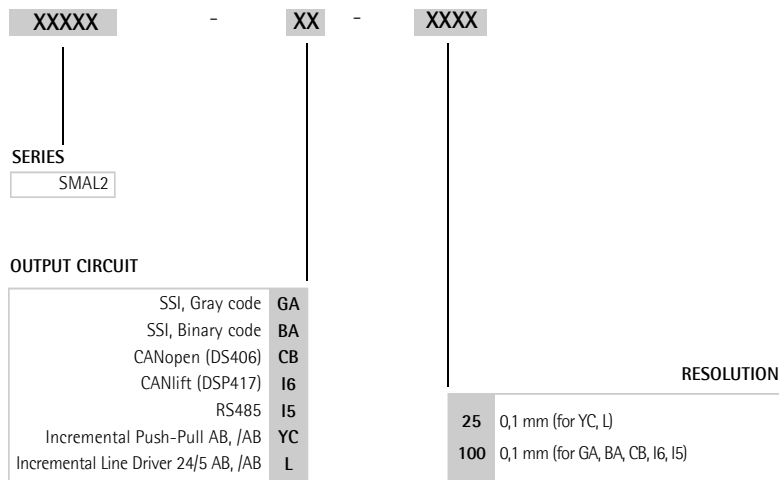

ORDERING CODE MTAL2

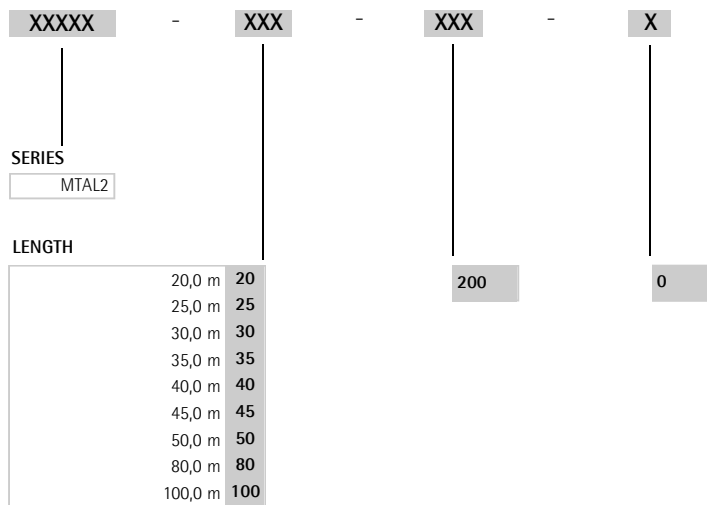

ACCESSORIES SMAL2

KIT MTAL:	Tape fixing system
EC-D9F-S25-Z8-2:	Connection cable 2 m
EC-D9F-S25-Z8-5:	Connection cable 5 m
EDE9S:	Mating connector
LKM-1690:	Fixing plate