




**40 YEARS
YOUNG**
1982.2022

lika[®]

Smart encoders & actuators

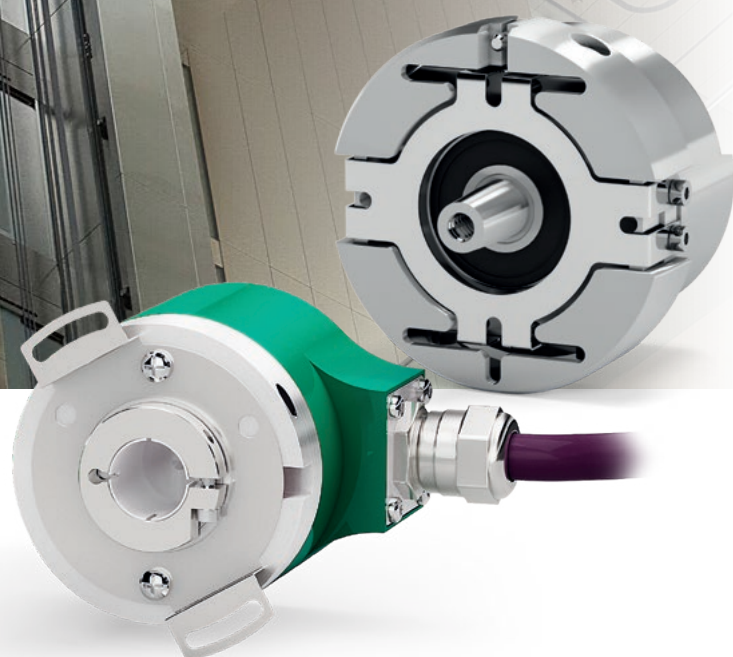

Products for the elevator industry



1982



40 YEARS YOUNG 2022

Since its inception in 1982, Lika Electronic **develops and manufactures incremental and absolute, optical and magnetic, rotary and linear encoders, incremental & absolute sensors, linear and rotary incremental & absolute magnetic measurement systems, integrated positioning units, displays & position controllers.**

Thanks to a wide range of technical engineering skills and in-depth knowledge and expertise in digital and analogical electronic design, software development & mechanical and optical components design, all managed inside the company, Lika Electronic is able to translate the **customers' specific requirements** and needs into **high-reliability and performance solutions** both serial and customized.

This has allowed Lika Electronic to be recognized among the leading manufacturers of encoders in Europe.

Lika Electronic operates worldwide providing a widespread and efficient global distribution network and an excellent customer service and superior technical support.

Lika Electronic is certified for compliance with **ISO 9001:2015 quality management system.**

Index

Encoders for gearless motors	page 6
Encoders for gear traction motors	page 8
Encoders for shaft copying & overspeed governors	page 10
Lift car & freight lift position measurement systems	page 11
Encoders and modules for lift doors & escalators	page 12
Flexible encoder couplings	page 14



Moving

Core of the elevator system is the motor used to raise and lower the elevator car.

Traditionally a geared traction motor drives a gear-type reduction unit, which turns the hoisting sheave. While slower than a typical gearless elevator, the gear reduction offers the advantage of requiring a less powerful motor to turn the sheave. These elevators typically operate at speeds up to 2.5 m/s (500 ft/min) and carry loads of up to 14,000 kg (30,000 pounds).

Gearless traction motor technology has brought about rapid changes within the elevator industry.

A few reasons for its increased popularity include the ability of longer travels up to the tallest buildings; higher mechanical and electrical efficiency; elimination of parts and thus reduced physical size that allows for a smaller machine room or machine-room-less (MRL) installations; and low overall maintenance.

Whatever you choose, both geared and gearless traction motors require rugged, vibration-resistant, high accuracy, high precision and long service life encoders to improve the car comfort and reduce the maintenance costs, at the highest safety levels.



Ensuring Safety

Overspeed governor is a mechanical speed control mechanism required by the standards for the prevention of free fall or the downward and even upward movement at excessive speed of the elevator car. It is a wire-rope driven device actuated by the centrifugal force exerted on a pulley when the motor speed has increased a set percentage over the rated name plate speed.

It acts both mechanically by driving the safety gear which stops and holds the movement of the car and electrically by tripping a switch which cuts off the power supply to the machine.

"Safety, first!" is the keyword. It is not inappropriate to state that elevators have started or at least have been developed after the overspeed governor has been devised. Nowadays there are several safety devices which are intended to control the proper running of the elevator and they are often invisible to passengers. Speed control, for instance, is a prerequisite for a comfortable but first and foremost safe and protected ride. For maximum safety and permanent and accurate control of the car position, high-resolution absolute encoders must be installed, that are precise and dependable at any situation. Although unexpected. Because safety comes first!



Controlling

Controlling the position of the elevator car and ensuring an accurate measurement of the speed is of the utmost importance in any modern elevator installation. Quiet and smooth ride, gentle stopping and greatest safety require the shaft copy system not to miss a pulse!

Thus the most dependable and finest absolute encoders must be installed to achieve exact monitoring of distances, speeds and accelerations of the elevator car. Furthermore, they have also to be insensitive to adverse ambient conditions such as high atmospheric humidity, dust and high temperature variations. Because every single movement must always be performed the safest and comfortable way, without exception.




Positioning

Perfect precision of levelling at landings is not only an unavoidable safety need, but also a specific requirement of lift directives. UNI EN 81-70 states that the stopping accuracy of the car shall be ± 10 mm (0.393"); while a levelling accuracy shall be maintained to ± 20 mm (0.787").

Even a small difference between the landing sill and the car sill can thus be unacceptable.


Car position measurement systems play a fundamental role in fully satisfying these strict requirements. Lika Electronic offers simple, robust and affordable solutions, capable of resolutions down to 0.1 mm (0.0039"). They allow for a balanced motion profile and high levelling accuracy in the most different load conditions.

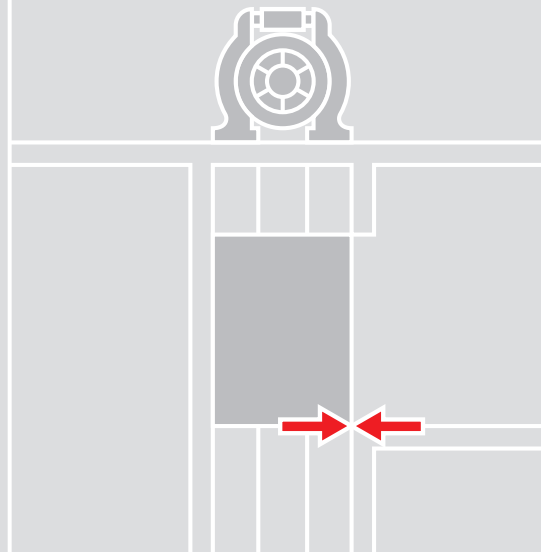

Sliding

Car doors are the first impression. They flatter our eyes through their shiny and fashionable surfaces, they wink while sliding smoothly and quietly in front of us. Actually they are much more than just aesthetic and design. Each day they open and close several thousand times, in a comfortable but quick way: the handling capacity of the lifts also depends on the controlled movement of the doors. The door operators must be simple and reliable and have a proven strength with high comfort levels. Nowadays, modern door operators are of the linear type: the movement of motor rotation is directly transferred to the panels by means of a toothed belt in order to limit the load.


Specific rugged encoders and heavy-duty pulley encoders for direct application on timing belts control the position of the doors at any moment and allow accurate doors movements. They are the most suitable solution to ensure highly increased reliability, lifetime and smoothness of operation.

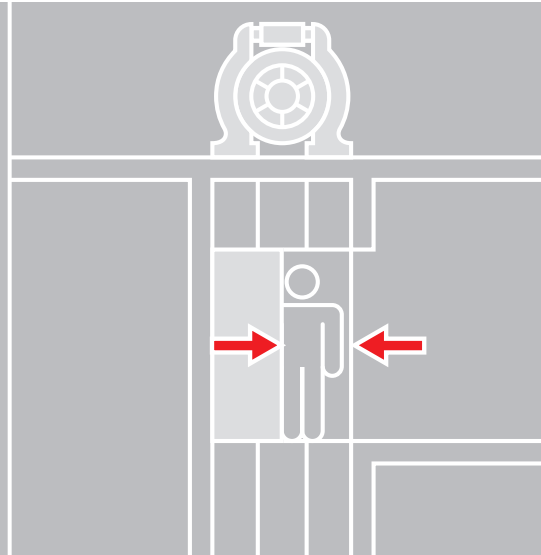

Travelling

People-flow management is increasing in importance day after day as millions of people need to be moved comfortably and safely through urban spaces.

Escalators and moving walks are thus gaining ground all over the world and are becoming indispensable in train stations and airports, shopping centres and hotels, underground stations and trade fairs. Safety, durability and maintenance-free reliability are the key words for each single component, although hidden away in the inside, not to convert motion into chaos. Reinforced velocity feedback encoders along with brakes are expressly designed to control the ride of the escalators and to ensure a safe stopping whenever required. For reliable 24-hour operation, heavy-duty escalators and moving walks need compact and rugged encoders, that are accurate and dependable at any time and capable of unlimited enduring service.

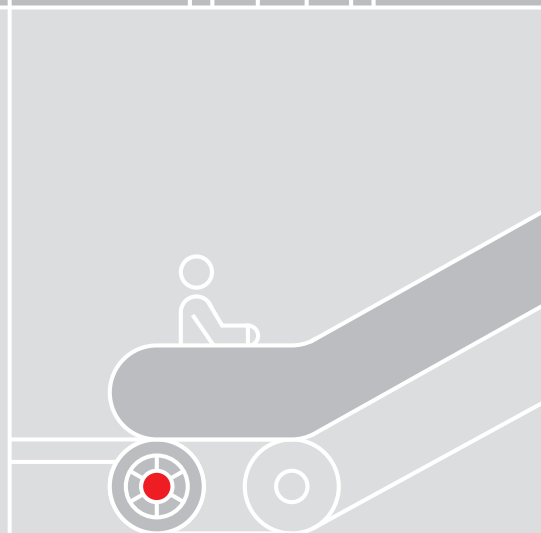

Encoders for gearless motors



CB62 • CB59



ASB62 SSI, BiSS

FEATURES

Incremental feedback encoder for gearless motors

- 2048 PPR sin/cos + CD track

- 1Vpp 5Vdc

- Cable output with PCB connector

- Tapered shaft (1:10)
- Hollow shaft $\varnothing$ 15 mm
- Expansion flange for easy installation

Absolute feedback encoder for gearless motors

- 13 bit + 2048 sin/cos

- 25 bit + 2048 sin/cos

- BiSS-C/SSI + 1Vpp

- Cable output with PCB connector

- Tapered shaft (1:10)
- Expansion flange for easy installation

OPTIONS

- Customized connection cables
- Several fixing plates available

- Customized connection cables
- Several fixing plates available

APPLICATION

- Feedback on gearless motors

- Feedback on gearless motors



Gearless motors require sturdy, vibration-resistant and compact encoders, especially in MRL installations. Lika Electronic has developed a comprehensive range of incremental and absolute encoders to meet the varied needs of gearless motors.

CB62 incremental encoder offers many fixing options including the tapered solid shaft + expansion flange for easy plug & play installation: it is ideal for high-precision direct coupling and guarantees an absolutely backlash-free and torsionally rigid mating. It features both Sine-Cosine signals for speed feedback and additional absolute CD signals to detect the position of the motor poles.

ASB62 absolute encoder is equipped with tapered solid shaft and expansion flange. It features up to 25 bit singleturn resolution and BiSS C-mode / SSI interfaces + 1Vpp incremental track for rotor absolute position and speed feedback.

ASC85 absolute encoder is equipped with a 50 mm / 1.968" through hollow shaft for direct mounting onto large diameter axles. It provides a space-saving clamping system with flexible fixing plate that allows to comfortably and firmly secure the encoder to the drive shaft by means of three eccentric screws. It features very high singleturn resolution up to 25 bits (33,554,432 cpr) and very high accuracy of $\pm 0.005^\circ$. BiSS-C / SSI interfaces available.

For demanding application in constricted and even harsh environments, **SMRI** miniature incremental modular encoder offers ring diameters up to 250 mm (9.842") and IP69K protection as well as maintenance-free operation. Resolution up to 180000 PPR.



ASC85



SMRI + MRI

FEATURES

Absolute encoder for advanced motor feedback systems.
High accuracy optical sensing.

- Resolution 25 bit
- BiSS-C / SSI + 1Vpp

- Cable output
- M12, M23 inline connector
- Ø50 mm through hollow shaft

Incremental magnetic ring encoder

- Resolution 12800, 16000 PPR or more
- Push-Pull
- Line Driver

- Cable output
- M12 inline connector

- Ø180 mm through hollow shaft

OPTIONS

- Connectors for all common lift controllers

- Several ring diameters
- Different sensor housings


APPLICATION

- Feedback on gearless motors


- Feedback on gearless motors



Encoders for gear traction motors

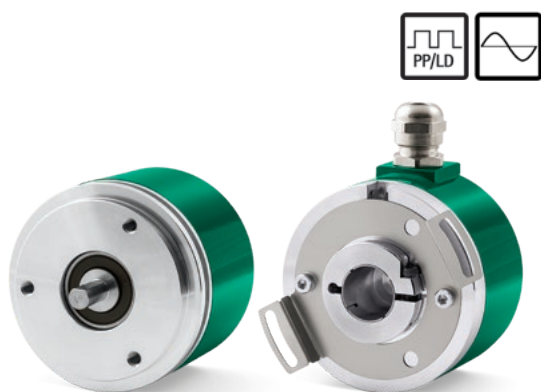

I58 • CK58 • CK59

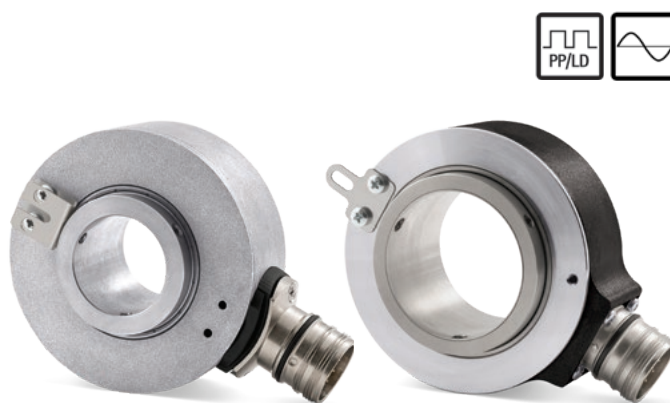

C80 • C82 • C83

FEATURES

Standard incremental encoder for elevators
Solid and blind hollow shaft

- Robust design for long lifetime
- Cable or connector output
- Universal output circuit

- 1024, 2048, 2500, 4096, 5000 PPR
- Other pulse rates available

- Universal output circuit (HTL+TTL) 5-30Vdc
- Push-Pull (HTL) 10-30Vdc
- Line Driver (TTL) 5Vdc
- Sine/cosine 1Vpp

- Solid shaft Ø6, 8, 9.52, 10, 12 mm
- Hollow shaft Ø14, 15 mm

Hollow shaft encoder for direct installation on motors

- Robust die-cast housing
- Low profile housing
- Cable or M23 connector output

- 1024, 2048, 4096, 8192 PPR
- Other pulse rates available

- Universal output circuit (HTL+TTL) 5-30Vdc
- Push-Pull (HTL) 10-30Vdc
- Line Driver (TTL) 5Vdc

- Hollow shaft Ø25, 30, 35, 38, 40, 44, 45 mm
- Other Ø with reduction sleeves

OPTIONS

- Bocoder versions (2 different resolutions)
- Connectors for all common lift controllers available
- Special shaft design

- Connectors for all common lift controllers available
- Custom designed fixing plates

APPLICATION

- Feedback on gear traction machines
- Position control on overspeed governors & shaft copying systems
- Feedback on gear traction machines with up to 45 mm shafts



After 20-plus years of extensive experience worldwide in the elevator industry, Lika Electronic offers a full lineup of incremental encoders for feedback on geared traction motors. They are designed to be rugged and durable as well as accurate in order to improve the car comfort and reduce the maintenance costs. Solid, blind hollow and through hollow shaft versions and a wide variety of mechanical and electrical interfaces give customers a great choice.

Shaft encoders such as cost-effective **I41** or versatile **I58** with resolution up to 10,000 PPR and high IP protection are installed using mounting bells and couplings. Hollow shaft encoders such as popular **C80**, **C82** and **C83** series can be mounted directly on motor shaft so saving space and avoiding mechanical adjustments. C82 is equipped with a large through hollow shaft for direct mounting onto up to 45 mm / 1.771" diameter axles. It further features increased shaft loading values (up to 200 N) and an extended range of the operating temperature (-40°C +100°C / -40°F +212°F). C50 is among the most popular incremental encoders from Lika. Because of the slim and compact design, C50 is ideal for installation where tight space is a primary concern.

Despite its small size, it is very tough. The standard operating temperature is extended to -40°C +100°C (-40°F +212°F), the protection rate is IP65. It is available in both through hollow shaft and tapered solid shaft versions. For maximum versatility and compatibility with elevator drive interfaces all encoders for geared motors are equipped with Universal circuit (HTL + TTL).



I58R



I41 • CK41



C50

FEATURES

Encoder with REO interface

- Cable output
- Safe signal transmission up to 80 m cable length

- 1024 PPR

- Push-Pull / HTL 7-30Vdc

- Solid shaft Ø11 mm

Compact encoder for small lift motors

- Cable output, 7 or 10 m
- Inline connectors available

- 512, 1024, 2048, 4096 PPR
other resolutions on request

- Universal output circuit (HTL+TTL) 5-30Vdc
- Push-Pull (HTL) 10-30Vdc
- Line Driver (TTL) 5Vdc

- Solid, hollow shaft Ø6, 8 mm

Hollow shaft encoder for small lift motors

- Cable output, 7 or 10 m
- Inline connectors available

- 512, 1024, 2048, 4096, 8192 PPR
other resolutions on request

- Universal output circuit (HTL+TTL) 5-30Vdc
- Push-Pull (HTL) 10-30Vdc
- Line Driver (TTL) 5Vdc

- Hollow shaft Ø6, 8, 10 mm

OPTIONS

- Connectors for all common lift controllers available

- Connectors for all common lift controllers available

- Connectors for all common lift controllers available

APPLICATION

- Feedback on gear traction machines
- Long transmission cables
- Tacho generator replacement

- Feedback on small traction machines

- Feedback on small traction machines



Encoders for shaft copying & overspeed governors



CANopen®



SGSM • SGSD



EBO58 • EBM58



EH058 • EHM58

FEATURES

Single or double bearingless encoder

Compact single and multiturn absolute encoder with CANopen & Modbus interfaces

Absolute single and multiturn encoder with solid or blind hollow shaft

- Up to 1024 PPR

- EBO58: 18 Bit, 18 x 12 Bit
- EBM58: 16 Bit, 13 x 14 Bit

- 24 Bit (+1024 PPR)
- 20 x 12 Bit (+1024 PPR)

- Push-Pull
- Line Driver

- CANopen
- Modbus RTU RS485

- SSI
- BiSS-C

- Cable output

- Cable output
- M12 connector

- Cable output
- M12 or M23 connectors

- Hollow shaft up to Ø50 mm

- Solid shaft Ø6, 8, 9.52, 10, 12 mm
- Hollow shaft Ø14, 15 mm

- Solid shaft Ø6, 8, 9.52, 10, 12 mm
- Hollow shaft Ø14, 15 mm

OPTIONS

- Most common controller connectors available

- Connectors for all common lift controllers available
- Other shaft Ø with reduction sleeves

- Connectors for all common lift controllers available
- Other shaft Ø with reduction sleeves

APPLICATION

- Direct installation on overspeed governors for shaft copying systems
- Unintended movement detection

- Position feedback on overspeed governors (shaft copying)

- Position feedback on overspeed governors (shaft copying)



Nowadays an overspeed governor paired with an incremental or absolute encoder for simple and reliable shaft copy is a safety system absolutely necessary for any elevator installation.

EH058 and EHM58 multiturn absolute encoders are among the most versatile products to fit this application: they offer proven reliability and ruggedness, resolution up to 20 + 12 bits, reinforced protection rate, extended range of the operating temperature as well as cables and plug connectors to suit the most common drives.

SGSM/SGSD bearingless incremental encoders are designed for outstanding dependability and absolute safety. Their non-contact operation and the advanced magnetic technology ensure steady and reliable functioning even in critical environments. They are virtually wear & maintenance-free, highly immune to dirt, finest dust particles, oil and grease and are also available in redundant version encompassing two separate sensors and independent circuitries in the same still compact housing.

Easy-CAN encoders are the cost-effective solution for standalone applications and simple point-to-point integrations. They are ideal for Single Master-Single Slave networks and profit from all CAN benefits and an essential compact design at the same time. Single connection cable and simplified electronics minimize the overall foot-print and costs and ease installation especially in constrained space. They comply with DS301 and DS406 Class 2 profiles and include the whole packet of CANopen functions.

Lift car & freight lift position measurement systems

lika

CANopen



SFEM • SFAM

FEATURES

Draw wire actuator for incremental or absolute encoders

- Measurement range up to 5 and 10 m (SFEM1/SFEM2 • SFAM1/SFAM2)
- Measurement range up to 10 and 50 m (SAK • SBK)

- Resolution down to 0.1 mm (other resolutions on request)

- SFEM1/SFEM2 with programmable incremental encoder
- SFAM1/SFAM2 with absolute encoder, SSI, analogue or CANopen
- SAK and SBK in combination with:
incremental encoders (I58)
absolute SSI (EHM58), absolute CANopen (EB058)


- Cable or connector (depending on encoder)

OPTIONS

- Seawater-proof housing
- Versions with ATEX encoder

APPLICATION

- Lifting platforms
- Freight lifts
- Hydraulic lift
- Portal cranes
- Scissor lifts

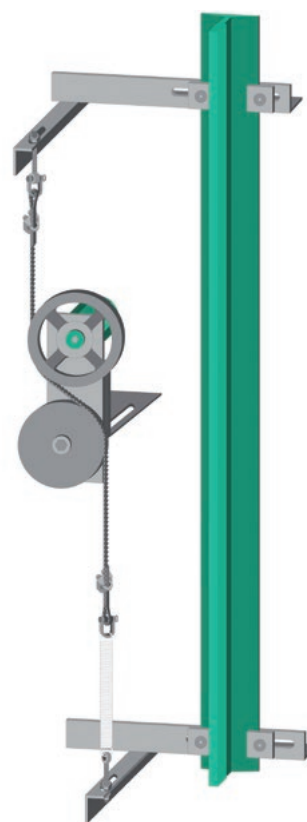

SCS



CANopen



FEATURES

- Digital shaft-copying systems
- Incremental or absolute encoders versions
- Guided and circumferential types
- Mechanical sets for toothed belts or round cords
- For elevators up to 180 m, max. speed up to 5 m/s
- ATEX certified shaft-copy systems available

Draw-wire units can be easily installed to measure car or platform positions on freight lifts, mobile platforms and scissor lifts as well as hoists and cranes.

SFEM / SFAM series draw-wire encoders are designed to be robust and reliable in short travels up to 10 m (32.8 ft) and offered in a very wide selection of interfaces: fully programmable incremental, SSI, analog with external buttons and a variety of bus and Ethernet-based interfaces.

SAK and SBK draw-wire encoders are suitable for long travels ranging between 10 m (32.8 ft) and 50 m (164 ft). They come in a robust enclosure with seawater-proof housing surface protection and can be supplied also in ATEX version.

The working principle of draw-wire encoders enables their installation also in inaccessible areas, even in aggressive environments.

SCS shaft-copying systems are typically installed on the lift cabin.

They allow to move the elevator precisely even over long runs and at high speed.

Long operating and maintenance free components ensure the elevator can be operated smoothly and are a guarantee for gentle stops at every floor.

These shaft-copying systems are designed to operate with a variety of incremental and absolute encoders. Connectors for every controller system are available on request.



Encoders and modules for lift doors & escalators



C50



C50



FEATURES

Compact hollow shaft incremental encoder

- 500, 1024 PPR
- Universal output circuit (HTL+TTL) 5-30Vdc
- Push-Pull (HTL) 10-30Vdc
- Line Driver (TTL) 5Vdc

- Cable output

- Hollow shaft Ø 6, 8, 10 mm

Extra-reliable low-cost incremental encoder for lift doors

- 500 PPR
- Push-Pull (HTL) 10-30Vdc

- Cable output
- Wago connector output

- Hollow shaft Ø 9 mm

OPTIONS

- Other resolutions on request
- Connectors for all common door controllers available
- Low-cost versions
- Special fixing plates

- Connectors for all common door controllers available


APPLICATION

- Speed control on lifts & escalators
- Door position control on high-end lifts




Encoders specific to car doors and escalators have been developed by Lika Electronic to meet the requirement of a high number of cycles and continuous duty. The **C50 series** is a long-lasting solution for reliable 24-hour operation of both car doors and elevators, suitable also for installations in critical environments such as off-shore and tropical climate.

Compact, lightweight, and high accuracy **optical kit encoders** and **magnetic modular encoders** are designed in an extensive choice of specifications, technologies, and options and can be customized to fit individual application requirements for door position control.

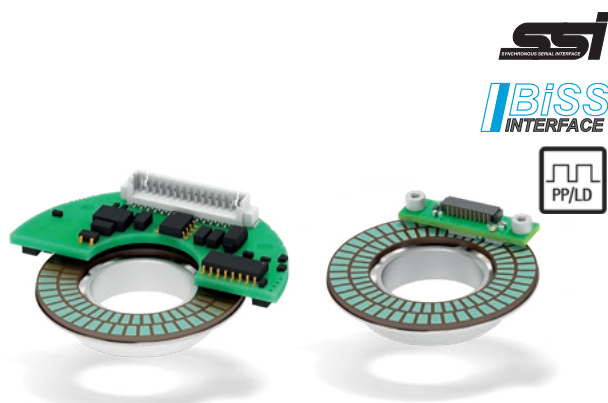

SMAR1 • SMAR4 Kit encoders

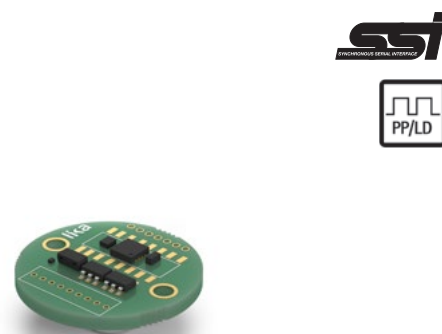

AMM20 • AMM24 Kit-encoders

FEATURES

Ultra flat Kit-encoders, absolute & incremental magnetic sensing

Magnetic kit-encoder, very compact dimensions, size 20 or 24 mm

- 19 Bit
- 65536 PPR

- 18 Bit
- 20000 PPR

- Absolute

- Incremental or absolute

- BiSS-C/SSI/SPI
- Line Driver

- SSI
- Push-Pull, Line Driver, Universal circuit

- PCB connector output

- soldering pads
- PCB connectors

- Hollow shaft Ø up to 47.7 mm

- depending on magnet hub

OPTIONS


- customized ring

- customized magnet holder

APPLICATION

- Lift doors
- Escalator motors

- Lift doors
- Servo motors

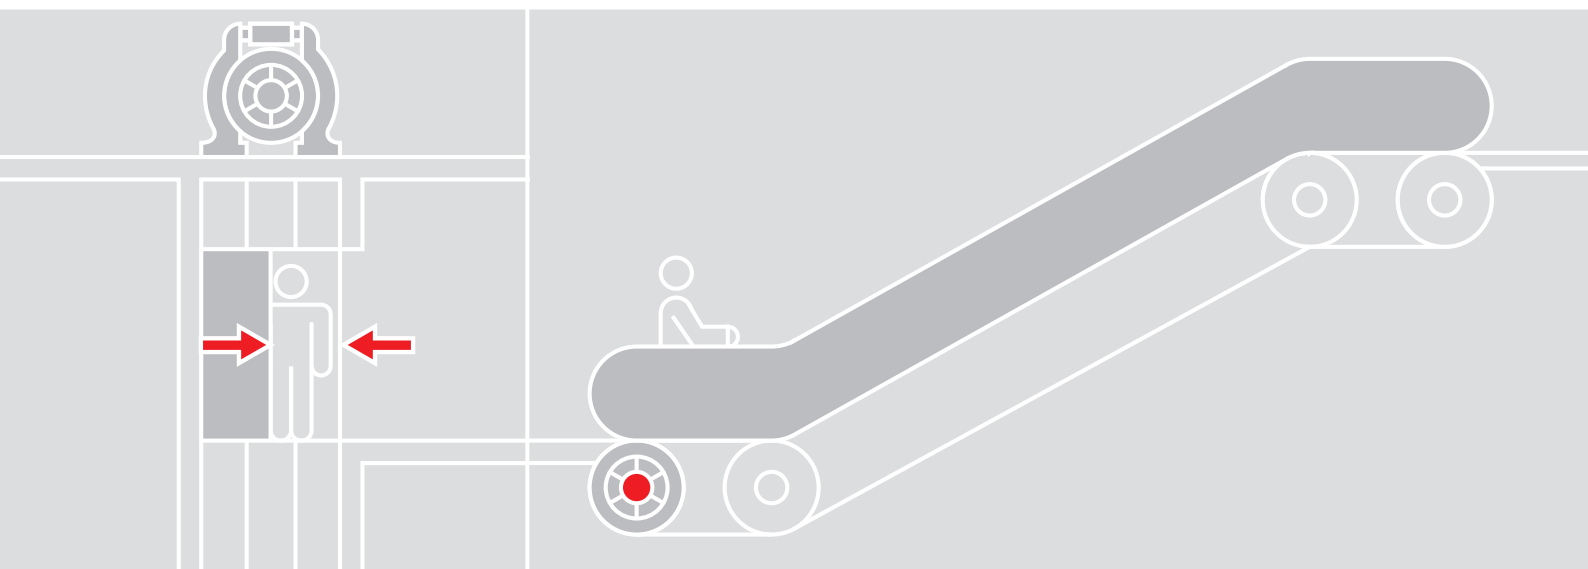



PGF



PAN



MOR • MOM



MSF

PGF	PAN	MOR • MOM	MSF
Standard double sleeve coupling	Flexible helix coupling	Oldham coupling, standard (MOR) and metal (MOM)	Modular coupling with high reliability
• Fixing by grub screws	• Fixing by grub screws	• Fixing by grub screws or collar	• Fixing by grub screws
• Standard diameters: Ø 6-6 mm Ø 8-8 mm Ø 10-10 mm	• Standard diameters: Ø 6-6 mm Ø 8-8 mm Ø 10-10 mm	• Standard diameters: any combination of Ø 6, 6.35, 8, 9.52, 10 mm	• Standard diameters: any combination of Ø 6, 6.35, 8, 10, 12 mm
• Special diameters: Ø 6-8 mm Ø 7-8 mm Ø 8-10 mm	• Special diameters: Ø 6-8 mm Ø 6-10 mm Ø 8-10 mm	• Special diameters: on request	• Special diameters: on request
FEATURES			
• High misalignments at slow speed • Silent running • Good vibration absorption	• Good misalignments • Good stiffness	• High misalignments at medium speed • Excellent vibration absorption • Long lifetime • Electric insulation of encoder shaft	• Extra-long lifetime • Good misalignments at medium speed • Good vibration absorption • Electric insulation of encoder shaft
MATERIAL			
• Metal hubs • Thermoplastic sleeves	• Aluminum	• Aluminum hubs • Polyacetal or steel spacer	• Metal hubs • PUR spacer
APPLICATION			
• Encoder connection on gear traction machines • Medium-slow speed elevators	• Encoder connection on gear traction machines • Medium speed elevators	• Encoder connection on gear traction machines • Medium-high speed elevators	• Encoder connection on gear traction machines • Medium-high speed elevators





Smart encoders & actuators

Lika Electronic Srl

Via S. Lorenzo, 25
36010 Carré (VI) • Italy
Tel. +39 0445 806600
info@lika.it • www.lika.it

German branch

Lika Electronic GmbH

Tecklenburger Weg 16
33428 Harsewinkel
Tel. +49 (0) 524798391-0
info@lika.biz • www.likaelectronic.de

Asia branch

Lika South East Asia Co. Ltd

66/2 Moo 1
Tambon Banlen, Amphur Bangpa-In,
Ayutthaya 13160, Thailand
Tel. +66 (0) 3535 0737
info@lika.co.th • www.lika.co.th

