

DRAW-WIRE

Absolute draw-wire encoder with analogue output

lika

Series

SFA-5000 TA • SFA-10000 TA



- Integrated absolute encoder
- Programmable analogue output
- Compact design & easy installation
- 5000 & 10000 mm measuring length
- Teach-in of travel length by push buttons
- Output 0-5V, 0-10V & 4-20mA
- Overrun function
- Cable or M12 connector



SFA-5000 TA

ENVIRONMENTAL SPECIFICATIONS

Shock:	100 g, 6 ms
Vibrations:	10 g, 5-2000 Hz
Protection:	IP65
Operating temperature range:	-40°C +85°C (-40°F +185°F)
Storage temperature range:	-40°C +100°C (-40°F +212°F) (98% R.H. without condensation)

MECHANICAL SPECIFICATIONS

Dimensions:	see drawing
Drum circumference:	200 mm
Wire retraction force:	5000: 3,2 ÷ 6,5 N 10000: 3,2 ÷ 6 N
Measuring length:	5000, 10000 mm
Linearity:	± 0,5 mm
Repeatability:	± 0,1 mm
Measuring speed:	2 m/sec max.
Weight:	~ 0,8 kg
Connections:	M12 plug or cable output 1 m

ELECTRICAL SPECIFICATIONS



Power supply:	+13Vdc +30Vdc
Output circuit:	0-5V, 0-10V, 4-20mA
Output range:	adjustable by teach-in buttons
Resolution:	65536 steps of output range (min. step = 0,048 mm)
Consumption:	1,5 W
Protection:	against inversion of polarity and short-circuit
Protection:	against inversion of polarity and short-circuit
EMC:	electro-magnetic immunity, according to: EN 61000-4-2 EN 61000-4-4
Optoelectronic life:	> 100.000 h
Functions:	• Teach-in of travel length • Overrun

MATERIALS

Housing (draw-wire):	anticorodal, UNI EN AW-6082
Housing (encoder):	die cast aluminium, UNI EN AC-46100
Wire:	stainless steel, non magnetic - UNI EN 4305

ACCESSORIES

E-M12FC:	M12 5 pin connector
EC-M12FC-LK-15-5:	M12 cordset with 5 m cable
EC-M12FC-LK-15-10:	M12 cordset with 10 m cable

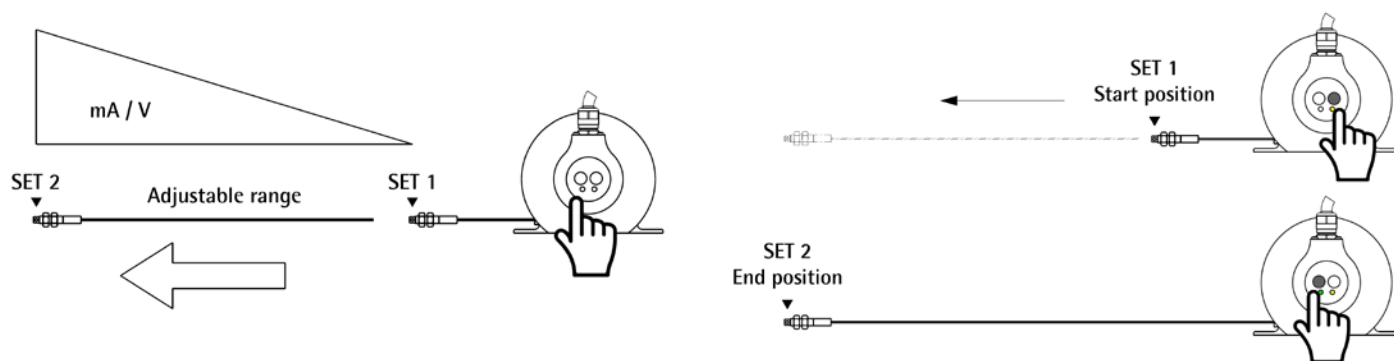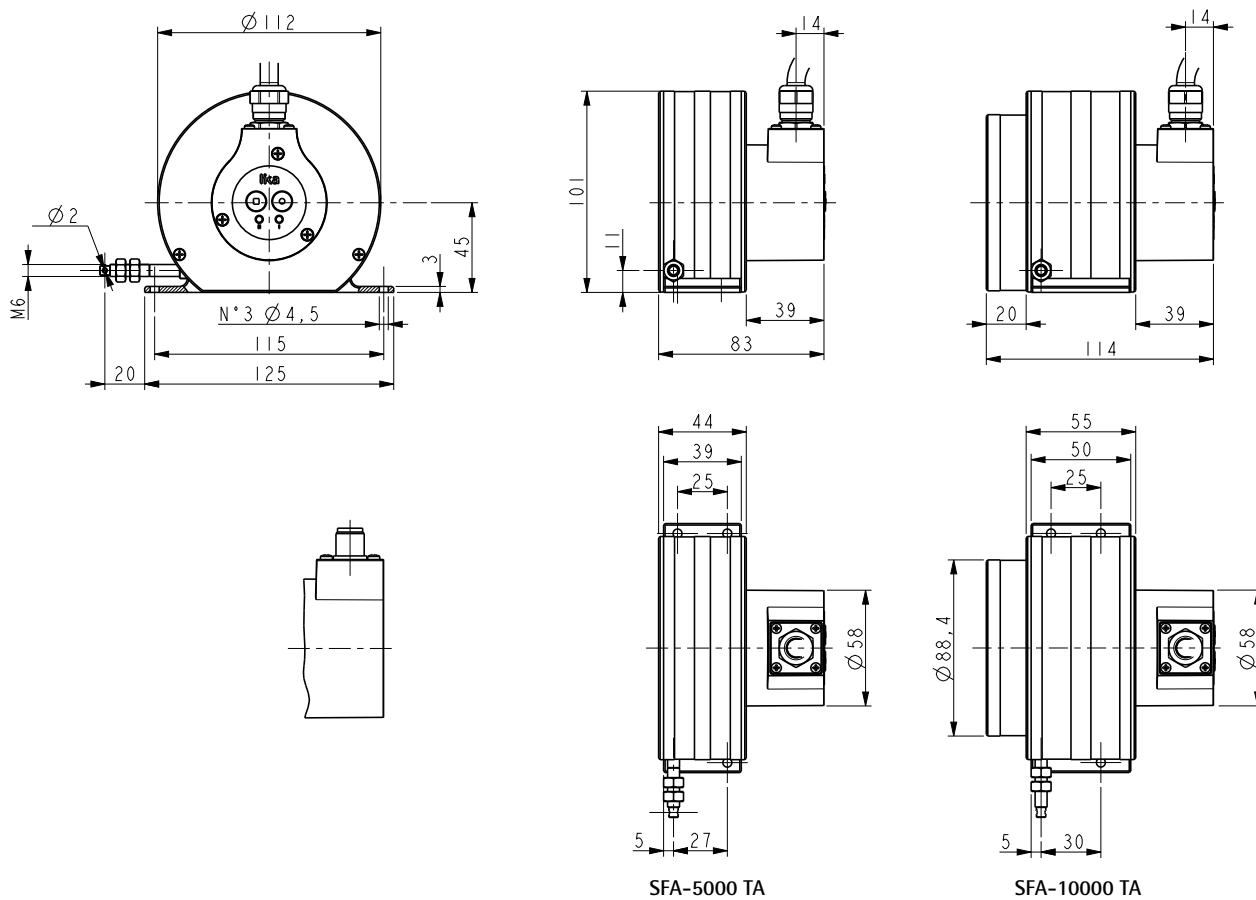

Order code

SFA	-	XXXXX	-	XXX	-	PROG	-	R	XX
		Ⓐ		Ⓑ		Ⓒ		Ⓓ	Ⓔ

Ⓐ MEASURING LENGTH

5000 = 5000 mm
10000 = 10000 mm

Ⓑ OUTPUT CIRCUIT

TI1 = 4-20 mA
TV1 = 0-5V
TV2 = 0-10V

Ⓒ RESOLUTION

PROG = adjustable by teach-in

Ⓓ CONNECTION POSITION

R = radial

Ⓔ CONNECTIONS

L1 = 1 meter
Lx = cable output x meters
M = M12 5 pin plug